

10/562102

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/114205 A1

(51) International Patent Classification⁷: G06K 19/07

(21) International Application Number:
PCT/IB2004/050966

(22) International Filing Date: 22 June 2004 (22.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03101886.4 25 June 2003 (25.06.2003) EP

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): AMTMANN, Franz [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).

RAGGAM, Peter [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT). RAUBER, Michael [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).


(74) Agent: RÖGGLA, Harald; Philips Intellectual Property & Standards, Triester Strasse 64, A-1101 Vienna (AT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: DATA CARRIER WITH MODIFICATION MEANS FOR MODIFYING THE LOAD PERIOD

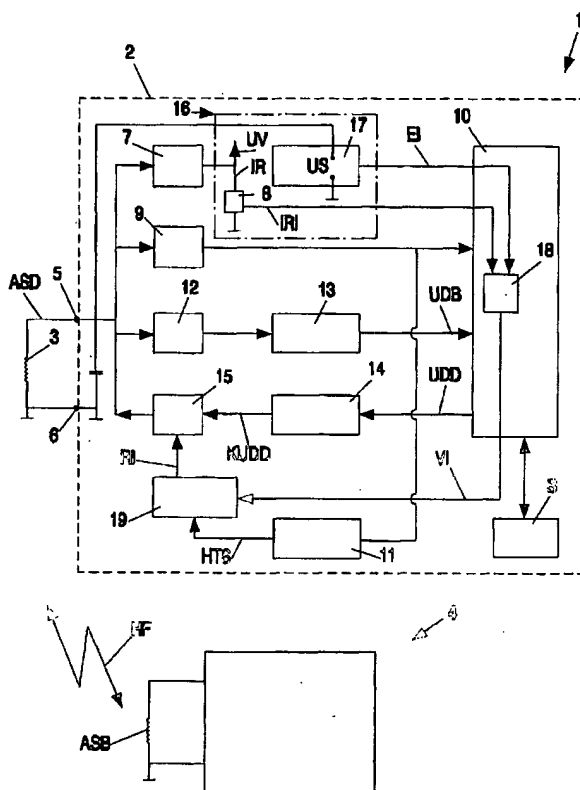

(57) Abstract: In a data carrier (1), there are provided modification means (19) for modifying, as a function of the distance between the data carrier (1) and the base station (4), the ratio of the duration of a load period (TB) to the duration of an off-load period (TE), at which ratio the data carrier (1) load-modulates the electromagnetic field (HF) generated by a base station (4).

WO 2004/114205 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*